


Detailed specifications

	Pressing force	Motor power	Oil tank capacity	Approach speed	Working speed	Return speed	Approximate weight	Bending length	Distance between frames	Side frame width	Table height	Daylight (opening height)	Stroke	Throat depth
Model	kN	kW	Lt	mm/s	mm/s	mm/s	Ton	mm	mm	mm	mm	mm	mm	mm
								A	B	C	G	K	L	N
PBO-1204	400	4	80	160	10	130	3.3	1250	1070	1470	800	455	215	410
PBO-2106	600	5.5	140	150	10	130	5.4	2100	1600	1580	880	475	210	410
PBO-2609	900	7.5	140	150	10	130	7.1	2600	2050	1580	880	540	260	410
PBO-3109	900	7.5	140	160	10	130	7.9	3100	2550	1590	880	530	260	410
PBO-3112	1200	11	140	160	10	130	8.4	3100	2550	1590	880	540	260	410
PBO-3116	1600	15	210	160	10	130	9.7	3100	2550	1600	880	540	260	410
PBO-3120	2000	19	210	150	10	130	10	3100	2550	1600	880	530	260	410
PBO-3124	2400	22	210	130	10	120	11	3100	2550	1610	880	530	260	410
PBO-3130	3000	22	280	110	8	100	15	3100	2550	1815	905	660	320	500
PBO-3144	4400	30	450	80	8	70	22	3100	2550	2060	1005	575	320	500
PBO-4116	1600	15	210	170	10	120	12	4100	3550	1600	880	530	260	410
PBO-4120	2000	18.5	210	160	10	110	12.5	4100	3550	1600	880	530	260	410
PBO-4124	2400	22	210	150	10	100	14	4100	3550	1610	880	530	260	410
PBO-4130	3000	22	280	120	8	90	18.5	4100	3550	1820	980	635	320	500
PBO-4144	4400	30	450	80	8	70	26	4100	3550	2235	955	590	320	500
PBO-6124	2400	22	300	140	10	100	25	6100	5100	1960	1100	500	260	500
PBO-6130	3000	22	300	120	8	70	30	6100	5100	2060	1115	560	320	500
PBO-6138	3800	30	450	90	8	70	35	6100	5100	2210	1100	570	320	500
PBO-6144	4400	30	450	90	8	70	39	6100	5100	2250	1100	570	320	500
PBO-6160	6000	37	500	80	7	70	55	6100	5100	2400	1050	620	360	500

Detailed specifications

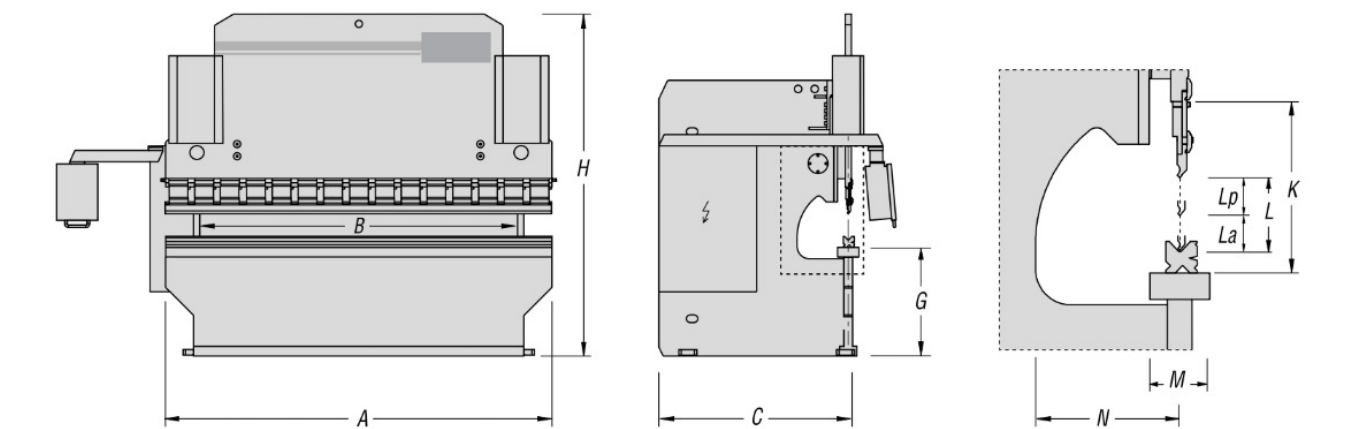

	Pressing force	Motor power	Oil tank capacity	Approach speed	Working speed	Return speed	Approximate weight	Bending length	Distance between frames	Side frame width	Table height	Daylight (opening height)	Stroke	Throat depth
Model	kN	kW	Lt	mm/s	mm/s	mm/s	Ton	mm	mm	mm	mm	mm	mm	mm
								A	B	C	G	K	L	N
PBO-3113	1350	11	180	210	10	130	8.35	3100	2600	2650	935	515	310	410
PBO-3713	1350	11	180	210	10	130	10	3700	3200	2650	945	515	310	410
PBO-4113	1350	11	180	210	10	130	10.6	4100	3600	2650	945	515	310	410
PBO-3122	2200	18.5	290	180	10	140	11.3	3100	2600	2650	940	515	310	410
PBO-3722	2200	18.5	290	180	10	140	12.85	3700	3200	2650	965	515	310	410
PBO-4122	2200	18.5	290	180	10	140	13.65	4100	3600	2650	965	515	310	410
PBO-5122	2200	18.5	290	180	10	140	17	5100	4200	2650	995	515	310	410
PBO-6122	2200	18.5	290	180	10	140	21.7	6100	5100	2650	995	515	310	410
PBO-3132	3200	22	290	150	10	110	14.7	3100	2600	2655	955	535	310	410
PBO-3732	3200	22	290	150	10	110	15.5	3700	3200	2655	955	535	310	410
PBO-4132	3200	22	290	150	10	110	16.8	4100	3600	2655	955	535	310	410
PBO-5132	3200	22	290	150	10	110	21.5	5100	4200	2655	1045	535	310	410
PBO-6132	3200	22	290	150	10	110	26	6100	5100	2655	1065	535	310	410
PBO-3140	4000	30	400	100	8	80	18.7	3100	2600	2685	1015	535	310	410
PBO-3740	4000	30	400	100	8	80	20.7	3700	3200	2685	975	535	310	410
PBO-4140	4000	30	400	100	8	80	22.5	4100	3600	2700	985	535	310	410
PBO-5140	4000	30	400	100	8	80	25.5	5100	4200	2700	980	535	310	410
PBO-6140	4000	30	400	100	8	80	33	6100	5100	2700	1055	535	310	410